VALVE SIZE	NUMBER OF 3/4" DIA. BARS REQUIRED	MAX. LENGTH OF SPIGOT PIPE
3"	2	24"
4"	2	24"
6"	2	27"
8"	2	27"
10"	4	27"
12"	6	27"
16"	8	36"
20"	12	36"
24"	16	36"
30"	20	42"

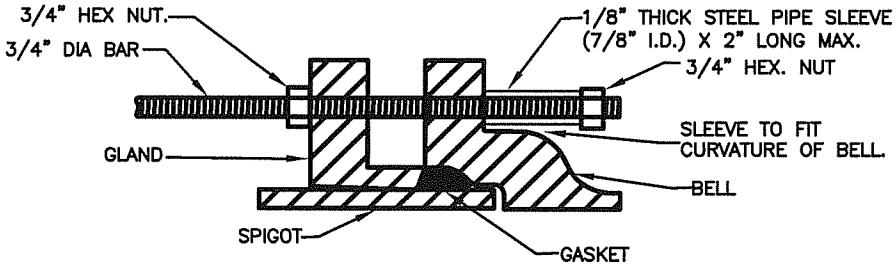

CROSS SECTION
SLEEVE AND BAR ASSEMBLY

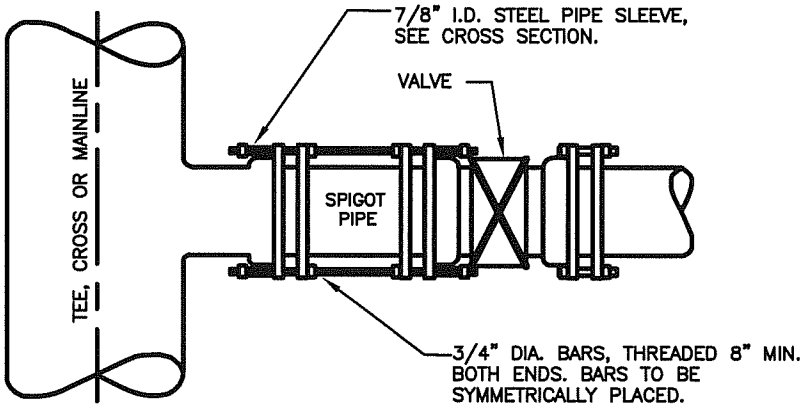

NOTES:

1. USE MECHANICAL JOINT FITTINGS ONLY.
2. COAT BARS AND APPURTENANCES WITH FIELD APPLIED COATING, SEE SPECIFICATIONS.
3. FOR ALTERNATIVE METHOD OF STRAPPING VALVE TO MAIN, SEE DETAIL P-3.

STANDARD DETAIL

METHOD OF STRAPPING VALVE TO MAIN

WASHINGTON TOWNSHIP MUNICIPAL AUTHORITY

DATE	REVISIONS

SCALE	DWG. NO.
NO SCALE	P-2