


**PLAN VIEW: TOP SLAB FOR CAST IN PLACE  
AND PRECAST VAULTS**

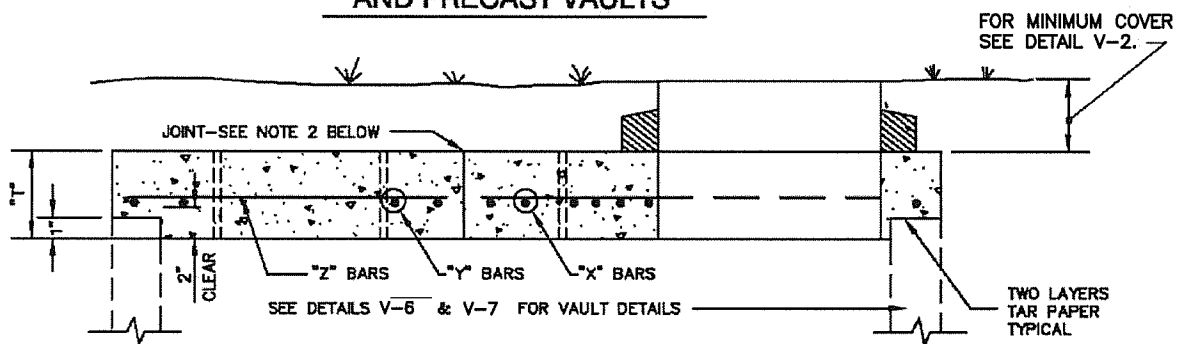

**SECTION A-A**

**NOTES:**

1. FOR PRECAST & CAST IN PLACE CONCRETE TOP SLAB THICKNESS & REINFORCING SEE DETAIL V-1.
2. FOR JOINT, LIFTING HOLE AND HATCH DETAILS, SEE DETAIL V-2.
3. PROVIDE 30"  $\phi$  OPENING IN TOP SLAB, SEE DETAIL V-2.
4. 8" W/CHECK VALVE & 10" F.M. METERS SHALL HAVE TOP SLAB IN THREE PIECES. SECTION W/ OPENING SHALL BE 5'-3". THE TWO REMAINING SECTIONS SHALL BE EQUAL.

STANDARD DETAIL  
CAST IN PLACE AND PRECAST  
CONCRETE TOP SLAB  
REINFORCING DETAILS  
WASHINGTON TOWNSHIP MUNICIPAL AUTHORITY

DATE	REVISIONS
SCALE NO SCALE	DWG. NO. V-3